




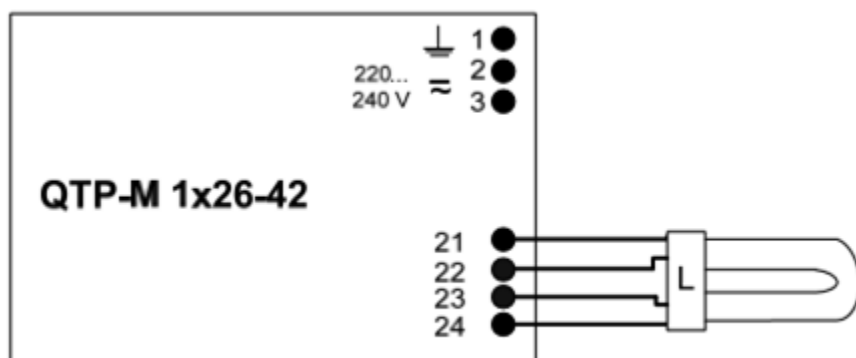


QUICKTRONIC® M

	QTP-M 1x26-42	QTP-M 2x26-32	QT-M 2x26-42
10A (B) 	17 x 	11 x 	8 x 
16A (B) 	28 x 	19 x 	13 x 
	≤ 15 A	≤ 25 A	≤ 28 A
T_H	200 µs	250 µs	230 µs

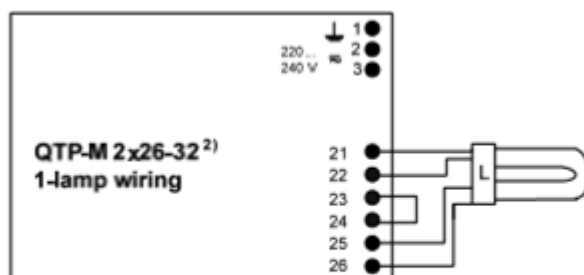

Max. permitted cable length in between ECG and lamp: 2.0 m (PIN 21; 22); 1.0 m (PIN 23; 24)

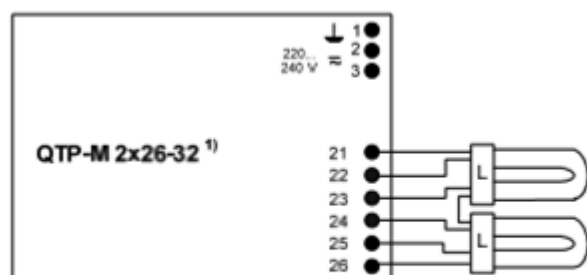

³⁾ Max. permitted cable length in between ECG and lamp: 2.0 m (PIN 21; 22); 1.0 m (PIN 23; 24)

⁴⁾ Max. permitted cable length in between ECG and lamp: 2.0 m (PIN 21; 22); 1.0 m (PIN 25; 26)



Max. permitted cable length in between ECG and lamp: 2.0 m (PIN 1; 2; 3; 5); 1.0 m (PIN 6; 7)

- (D) Max. Leitungslänge zwischen EVG und Lampe; Leitungslänge max.
 (RUS) Максимально допустимая длина кабеля между ЭПРА и лампой
 (KZ) Құрылғы мен шам арасындағы кабельдің максималды ұзындығы

**QUICKTRONIC® PROFESSIONAL
MULTIWATT QTP-M 1x26-42**

lamp	I _N [A]	lamp	I _N [A]	lamp	I _N [A]	
T/E 32W	0.16	DL 36W	0.15	FC 40W	0.19	$\lambda = 0.97$
T/E 42W	0.20	DF 36W	0.15	L 36W	0.16	$U_N = 220...240V$
		DL 40W	0.19	HO 39W	0.18	$f_N = 0;50...60Hz$
						$t_a = -20...50^{\circ}C$
DL 24W	0.12	DF 24W	0.12	FC 22W	0.12	$\lambda = 0.94C$
				HO 24W	0.12	
DL 18W	0.09	DF 18W	0.09	L 18W	0.10	$\lambda = 0.88C$
D/E 26W	0.13	T/E 26W	0.13			$\lambda = 0.95$

1) Range of application: AC/DC 198V to 264V
Suitable for DC/Battery operation
Connect PE to PIN 1
Range of battery voltage 186V to 276V
Starting time 1sec.
Made in China by OSRAM

2) Lamp

3) wire preparation push in
s: 0.5 - 1.5
f: 0.75 - 1.5
8 - 9mm

7) leads max. 2m
U-OUT=430V
leads max. 1m

8) Year
9) Week
10) Weekday

P 14 25 X

P1425

OSRAM

1) Anwendungsbereich: AC/DC 198V – 264V; Geeignet für DC Betrieb/Batteriebetrieb; Verbinde PE zu PIN 1; Batterie Spannungsbereich; Startzeit < 1Sek.; 2) Lampe; 3) Drahtvorbereitung; 4) Hergestellt in China; 7) Kabel max.; 8) Jahr; 9) Woche; 10) Wochentag (optional);

1) Область применения AC/DC 198-264В; Подходит для DC; Соединить защитный проводник с корпусом или PE 1; Время запуска <1 сек.; 2) Лампа; 3) Подготовка кабеля; 4) Сделано в Китае; 7) Кабель; 8) Год; 9) Не-деля; 10) день недели (опционально)

1) Қолдану аясы AC / DC 198-264V; Қолдану аясы DC; Қорапты қорғаныш өткізгішін қосыңыз немесе PE 1; Іске қосылу уақыты <1 сек; 2) Шам; 3) Сымды дайындау; 4) Қытайда жасалған; 7) шоғырсым; 8) Жыл; 9) Апта; 10) Жұмыс күндері (таңдаулы)

Εισαγωγή & διάθεση: OSRAM AE. Λ. Αθηνών 31-33, 104 47 Αθήνα

Производитель/Өндіруші: OSRAM GmbH, Марсель-Бройер-штрассе 6, 80807 Мюнхен, Германия. Импортёр/Импортер: ОАО «ОСРАМ» 214020 г. Смоленск/Смоленск қ., ул. Индустриальная 9-А/Индустриальная к., 9-А, тел.: +7 (4812) 62-86-00

Forgalmazó: OSRAM a.s. Mo-i Fióktelepe, 1119 Bp., Fehérvári út 84/A

Importer: OSRAM sp. z o.o., ul. Wiertnicza 117, 02-952 Warszawa

İthalatçı: OSRAM Aydınlatma Tic. A.Ş., Nispetiye Mah., Başlık Sok., MM Plaza, No:3 K:2, Etiler Beşiktaş İstanbul, +90 212 306-9000

OSRAM Romania SRL, Soseaua Bucuresti Nord Nr. 10, Global City Business Park, Cladirea O21, etaj 10, 077190 Voluntari, judetul Ilfov

Производитель: OSRAM GmbH, Доставчик: ОСРАМ ЕООД, 1505 София, бул. Ситняково 48, офис 604, +359 - (0)2 - 9712262

Uvoznik: OSRAM d.o.o., Đorđa Stanojevića 14, 11070 Beograd, Srbija

Виробник: OSRAM GmbH, 80920 Мюнхен, Німеччина. Імпортёр: ПП „ОСРАМ Україна“, вул. Димитрова, 5, 03150 Київ, Україна



05.03.15

G-10557917

OSRAM GmbH
Steinerne Furt 62
86167 Augsburg
Germany
www.osram.com
www.osram.ru/EAC